

A Survey Study On Electrocardiogram (ECG) Signal Noise Reduction Techniques

Sonu Singh Kaurav¹, Karuna Markam²

Electronics Engineering Department^{1,2}

Madhav Institute of Technology & Science, Gwalior^{1,2}

sskccn@gmail.com, karuna_markam@rediffmail.com

Abstract-Noise always degrades the quality of ECG signal. ECG noise removal is complicated due to time varying nature of ECG signal. As the ECG signal is used for the primary diagnosis and analysis of heart diseases, a good quality of ECG signal is necessary. A survey of various types of noises corrupting ECG signal and various approaches based on Wavelet Transform, Fuzzy logic, FIR filtering, Empirical Mode Decomposition used in denoising the signal effectively are presented in this paper. The result tables comparing the performances of various denoising techniques based on related parameters are included.

Keywords- ECG, FIR, IIR, Wavelet Transform, Fuzzy logic, Empirical Mode Decomposition, Adaptive Filter

I. INTRODUCTION

The electrocardiogram (ECG) is the recording of the electrical activity of heart which is extensively used for the diagnosis of heart diseases. ECG is a weak non-stationary signal which is interfered by various noises e.g. power line interference, baseline drift, electrode contact noise, EMG interference. ECG signal denoising is the process to separate the valid signal component from undesired signals to obtain noise free ECG that facilitates easy and accurate diagnosis. A denoising approach should detect the different noises in the data and filter the data while ensuring the obtained results not influenced by undetected artifacts.

Some of the approaches used for de-noising the ECG signal are adaptive filtering, FIR filtering, Fuzzy logic, Empirical Mode Decomposition and Wavelet transform. Adaptive filtering is the most widely used technique for denoising. Wavelet transform is the recent approach with different types of thresholding techniques.

The rest of the paper is arranged as follows. The noises which contaminate the ECG signal are presented in section II, in section III various methods of ECG de-noising techniques are presented, in section IV the Future Scope and finally we conclude in section V.

II. NOISES IN ECG

In ECG signal the common type of noises are given below

1. Baseline wander interference
2. Power line interference
3. Muscle contraction noise

4. Electrosurgical noise

5. Motion artifacts

ECG preprocessing generally takes care of denoising the ECG signal. The base line wandering and the power line interference are the most substantial noise and can strongly affect the ECG signal analysis. Base line wandering usually comes from respiration and lies between 0.15 and 0.3 Hz. The power line interference is a narrow-band noise centered at 50/60 Hz with a bandwidth of less than 1 Hz.

Remove or minimize these interferences prior to further diagnosis for any medical application. The QRS segment is very important and it is predominantly used for clinical observation. So if the noise changes the amplitude or time duration of the segment then recognizing the true condition of patient is very difficult task. Therefore the primary concern is to preprocess the ECG signal. The objective is to separate the valid signal component from the undesired noises so that the accurate interpretation of ECG could be done.

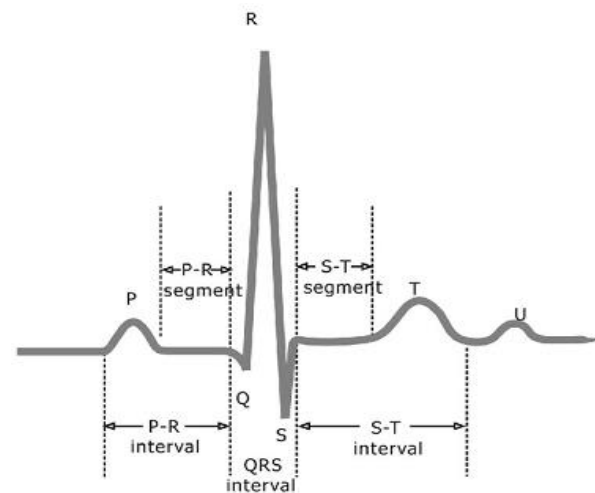


Fig. 1 ECG Waveform

Baseline Wander: Caused by respiration or patient movement which creates problems in the detection of peaks. Due to wander T peak would be higher than R peak which might be detected as R peak instead. Amplitude variation is 15% of peak to peak ECG amplitude[19]

Power line interference: Power line interference consists of 60/50 Hz pickup and harmonics and the amplitude is 50% of peak-to-peak ECG amplitude. Some of the common causes of the 50 Hz interferences are [20]:

- stray effect of the alternating current fields due to loops in the cables
- improper grounding of ECG machine or the patient
- disconnected electrode
- Electromagnetic interference from the power lines
- Electrical equipments such as air conditioner, elevators and X-ray units draw heavy power line current, which induce 50 Hz signals in the input circuits of the ECG machine.

Muscle contractions: Also called as EMG (electromyography) noise which is induced by the patient's movement and is responsible for artifactual milli-volt level potentials to be generated [18]. The standard deviation of this kind of noise is 10% of peak to peak ECG amplitude

Electrode contact noise: The connection between patient and measuring system is interrupted for a short duration due to improper contact of the electrodes which creates electrode contact noise which is of duration 1 sec and amplitude of which is maximum recorded output of ECG signal with frequency of 60Hz [19].

Motion artifact: Transient base line changes caused by changes in the electrode-skin impedance with electrode motion due to movement of the patient while the ECG is being recorded. [18]. Duration of this noise is 100-500ms with amplitude of 500% peak to peak ECG amplitude[19].

III. DENOISING TECHNIQUES

Mohandas Choudhary et. al. in [1] made comparative study between Butterworth, Chebyshev Type-I and Chebyshev Type-II based on parameters signal to noise ratio and average power for their use in suppression of noise in ECG signal. It is concluded that Butterworth low pass filter are better.

MA Mneimneh et. al. in [2] proposed an adaptive Kalman filter for the real time removal of baseline wandering. The Kalman filter has the ability to simultaneously model both the ECG signal and the baseline wandering. The comparison of the proposed approach is made with moving averaging and cubic spline baseline removal techniques which shows that distortion is minimum in case of the proposed approach. Due to adaptability and convergence factor of Kalman filter the approach fails to remove baseline wander under high

frequency changes. Table 1 shows comparison between baseline removal techniques [2].

Table 1: Comparison between baseline removal techniques.

Algorithm	Mean Error	Error STD
Kalman Filter	0.073	0.076
Moving	0.215	1.858
Cubic Spline	1.010	3.666

Donghui Zhang in [3] proposed an approach for baseline wander correction and denoising that is based on discrete wavelet transform. The wavelet shrinkage method using Empirical Bayes posterior median is used to reduce the high-frequency noise for which the Symlet wavelet with order 8 and decomposition level up to 6 is used

P. Mithun et. al. in [4] proposed the wavelet-based denoising technique for suppressing EMG noise and motion artifact in ECG which has advantages that this approach does not require a reference as required in adaptive filtering techniques and also it does not require multi-channel signals as required by ICA-based techniques. Also identification of R-peaks as required in the cubic spline and EMD based techniques are not needed. The discrete Meyer wavelet is the selected wavelet basis function. Combining the features of hard and soft thresholding EMG noise was reduced while by limiting the wavelet coefficients Motion artifact was reduced.

Wei Zhang et. al. in [5] proposed a sub-band adaptation filtered algorithm based on wavelet transform to extract a weak ECG signal in a strong noisy environment. It is a hybrid approach that is based on fixed sub-band decomposition and the decorrelation property of wavelet transform and property of adaptation filter. The algorithm successfully improves the extracting precision and speed and provides strong stability

Md. Ashfanor Kabir et. al. in [6] proposed a windowing method in the Empirical Mode Decomposition domain. Unlike the conventional approaches which completely discard the initial intrinsic mode functions, the method preserves the QRS complex information in the first three high frequency intrinsic mode functions. The intrinsic oscillatory modes are identified by their characteristic time scales in the signal and then the signal is decomposed into intrinsic mode functions. The noisy signal is enhanced in the Empirical Mode Decomposition domain and then transformed into the wavelet domain in which an adaptive thresholding scheme is applied to the wavelet coefficients to preserve the QRS information. An adaptive soft thresholding is performed in the Discrete Wavelet Transform domain even after reconstruction to reduce the noise that remains after the Empirical Mode Decomposition

operation. Table 2 compares the mean Percent Root mean square Difference (PRD) of different denoising methods [6].

Table 2: Comparison of the mean PRD (%) for different denoising methods at different input SNR levels

Input SNR Level [dB]	EMD soft thresholding	Wavelet soft thresholding	EMD wavelet	Proposed method
6	64.73	58.46	51.87	48.44
10	54.23	47.96	43.38	40.52
15	35.26	32.98	30.40	25.68
20	28.92	20.65	17.55	13.46

K.D. Chinchkhede et. al. in [7] have investigated the improvement of raw and noisy ECG signals by various window based FIR filters. The Power Spectral Density and spectrogram analysis was carried out to study the effect of noise on ECG. In order to measure the performance of denoising, SNR of processed ECG is calculated and correlation coefficient was determined to find the degree of mismatch between raw ECG and filtered noisy ECG. The designed FIR filter with Kaiser window works excellent as compared to the Gaussian, Blackman and Blackman-Harris filter in removing baseline wandering and power line interference under different noisy conditions.

Manuel B. V. et. al. in [8] proposed a method based on Empirical Mode Decomposition to remove high frequency noise and baseline wander. The signal is decomposed into a sum of intrinsic mode functions which represent simple oscillatory mode. The noise components lie in the first several Intrinsic Mode Functions (IMF). Different IMFs are chosen and processed to successfully achieve the denoising and baseline wander removal. By partial signal reconstruction high frequency denoising is carried out. The method is suitable for real noise cases too.

Bingo W. et. al. in [9] formulated some fuzzy rules to integrate different multiwavelets, pre and post filters together to denoise ECG signal. As different multiwavelets, pre and post filters have different impulse responses and frequency responses, fuzzy rules are used to select and employ the best suitable multiwavelets, pre and post filters at different noise levels. Though the denoising performance is improved, choosing a membership function is difficult which seems to be the drawback.

Seema rani et. al. in [10] made a comparative study of use of FIR and IIR filters in removing baseline noises present in ECG signal. Spectral density and average power of signal are the two evaluation parameters considered to check the suppression of baseline noises. According to the obtained implementation results, though FIR and IIR filters both have removed the baseline noises due to large order of FIR filter there is a phase delay in FIR filtered waveforms. The computational complexity, memory requirement and power dissipation of IIR filter is less than FIR filters which makes

IIR filters the better choice for removal of baseline noises. Table 3 compares the complexity of FIR and IIR filters [10].

Table 3: Comparison of complexity FIR and IIR filters

Filter Type	Min. Order	No. of Adders	No. of Multipliers	No. of delays
FIR	320	320	321	320
IIR	2	4	4	2

L Chmelka et. al. in [11] used wavelet based wiener filter to suppress EMG noise from ECG signal. The filtering is based on modification of the coefficients of wavelet transform depending on estimated noise level. For pilot estimation wavelet filtering with hybrid thresholding is used. The results obtained are good for filter banks with short impulse response while worst for filter banks with long impulse response.

Mashud Khan et. al. in [12] proposed Signal-Noise residue algorithm based on Wavelet theory for ECG signal denoising. The algorithm assumes that a raw ECG signal is linear combination of noise and ECG signal. The symmlet 8 mother wavelet with highest number of vanishing moments and multiscale decomposition of the signal enables accurate estimation of noise and hence it becomes easier to remove the noise with minimal computation.

Ying -Wen Bai et. al. in [13] made a comparative study of general notch filter, comb notch filter and equiripple notch filter. The performance is measured with respect to mean square error. It is observed that the equiripple notch filter retains the detail of practical signal effectively at the expense of higher filter order while the comb and general notch filters weaken the features of the ECG signal.

Jyoti Dhiman et al. [14] presented a comparison study between various adaptive filter algorithm (LMS, NLMS and RLS) on the basis of signal to noise ratio (SNR) at 1.5KHz sampling frequency, complexity, stability. It concludes that the best adaptive algorithm is Recursive Least Square according to the SNR improvement table.

TABLE 4
SNR BASED COMPARISON BETWEEN ALGORITHMS

Noise Variance μ	Sampling Rate (kHz)	SNR (dB) LMS	SNR (dB) NLMS	SNR (dB) RLS
0.02	1.5	8.85	9.85	9.91
0.05	1.5	7.55	8.62	8.89
0.10	1.5	5.12	6.38	7.02

Rashmi panda et al. [15] proposed the FIR based on filter window techniques to reduce the power line interference and Base line wandering in ECG signal. The noisy signal passed through four different window based FIR filter named as Rectangular, Hanning, Hamming, Blackman and compared the result on the basis of peak signal to noise ratio (PSNR). Simulation results confirm that the Rectangular window technique is able to remove much noise from ECG signal because the PSNR value is high as compare to other techniques shown in table 5.

TABLE 5
PSNR BASED COMPARISON BETWEEN WINDOWS

Window Type	PSNR(dB)
Rectangular	20.31
Hanning	17.65
Hamming	17.90
Blackman	18.01

Gordan Cornelia et. al. in [16] used wavelet transform to filter and analyze noisy ECG signal. Through wavelet thresholding all relevant noise are removed of the signal. Signal was decomposed using a three level wavelet decomposition. The Daubechies db1 and db3 wavelets, the symlet sym2 and the first order coiflet coif1 wavelets were used for analysis and it was found that the best results are obtained with the db3 wavelet, and the worst ones with the sym wavelet. Table 4 compares different wavelets [16].

Mahesh Chavan et. al. in [17] designed and implemented digital FIR Equiripple notch filter to remove power line interference from ECG signal. The filter reduces powerline interference successfully however higher order filter is required. This increases the computational complexity and it is difficult to realize the higher order filter. It also increases the delay in response. As compared with the window method, reduction in signal power is more in the Equiripple method. In the window method the number of elements required are less while in Equiripple method more computational elements are required therefore computational time is the major limiting parameter of the Equiripple type digital filter implemented on the noisy ECG signal. The effect of variation in the line frequency is not considered. Table 2 shows the comparison of different FIR structures for Power Line Interference(PLI) reduction [17].

IV.CONCLUSION

We have presented in this paper a survey on different techniques that aim at removing various types of noise corrupting ECG signal. We find that Equiripple notch filter is the best choice to remove power line interference while to remove motion artifact and EMG noise we should select

discrete Meyer wavelet and apply the improved thresholding function which combines features of hard and soft thresholding . To remove baseline wander we suggest to use empirical mode decomposition based approach

V.FUTURE SCOPE

Some methods are focussed to remove power line interference while others are aimed at removing baseline wander and other types of noise. Every method has some disadvantages associated with it. Future research should aim at removing all types of noises from ECG signal using a single hybrid approach which can be the combination of existing approaches

REFERENCES:

- [1]Mohandas Choudhary , Ravindra Pratap Narwaria." Suppression of Noise in ECG Signal Using Low pass.IIR Filters". ISSN 2277-1956/V1N4-2238-2243, International Journal of Electronics and Computer Science Engineering,2011.
- [2]MA Mneimneh, EE Yaz, MT Johnson, RJ Povinelli." An Adaptive Kalman Filter for Removing Baseline Wandering in ECG Signals".Computers in Cardiology 2006;33:253–256
- [3]Donghui Zhang. " Wavelet Approach for ECG Baseline Wander Correction and Noise Reduction" Proceedings of the 2005 IEEE Engineering in Medicine and Biology 27th Annual Conference Shanghai, China, September 1-4, 2005
- [4]P. Mithun, Prem C. Pandey, Toney Sebastian, Prashant Mishra, and Vinod K. Pandey." A Wavelet Based Technique for Suppression of EMG Noise and Motion Artifact in Ambulatory ECG". 33rd Annual International Conference of the IEEE EMBS Boston, Massachusetts USA, August 30 - September 3, 2011.
- [5]Wei Zhang,Xu Wang , Linlin Ge , Zhuo Zhang." Noise Reduction in ECG Signal Based on Adaptive Wavelet Transform". Proceedings of the 2005 IEEE Engineering in Medicine and Biology 27th Annual Conference Shanghai, China, September 1-4,2005.
- [6] Md. Ashfanoor Kabir , Celia Shahnaz." ECG Signal Denoising Method Based on Enhancement Algorithms in EMD and Wavelet Domains." 978-1-4577-0255-6/11.IEEE-2011.
- [7]K.D. Chinchkhede, Govind Sharan Yadav, S.R Hirekhan, D.R Solanke." On the Implementation of FIR Filter with Various Windows for Enhancement of ECG signal". International Journal of Engineering Science and Technology (IJEST), ISSN:0975 5462 Vol. 3 No. 3 March 2011
- [8]Manuel Blanco-Velasco, Binwei Weng, Kenneth E. Barner." ECG signal denoising and baseline wander correction based on the empirical mode decomposition". Computers in Biology and Medicine 38 (2008) 1 – 13
- [9]Bingo Wing-Kuen Ling, Charlotte Yuk-Fan Ho, Hak-Keung Lam ,Thomas Pak-Lin Wong ,Albert Yick-Po Chan and Peter Kwong Shun Tam." Fuzzy Rule Based Multiwavelet ECG Signal Denoising".978-1-4244-1819-0/08. IEEE-2008.

- [10]Seema Rani , Amarpreet kaur , J S Ubhi. "Comparative study of FIR and IIR filters for the removal of Baseline noises from ECG signal" International Journal of Computer Science and Information Technologies Vol 2 (3), 2011
- [11]L Chmelka , J Kozumplik. "Wavelet-Based Wiener Filter for Electrocardiogram Signal Denoising".0276-6547/05.Computers in cardiology 2005;32: 771-774.IEEE-2005.
- [12]Mashud Khan,Faizen Aslam,Tahir Zaidi,Shoab A. Khan."Wavelet Based ECG Denoising Using Signal-Noise ResidueMethod" .978-1-4244-5089-3/11 , IEEE,2011.
- [13] Ying –Wen Bai,Wen-Yang Chu,Chien-Yu, Yi –Ting , Yi-Ching Tsai and Cheng-Hung Tsai "Adjustable 60 HZ Noise Reduction by a Notch Filter for ECG signal" International and Measurement Technology conference como Itlay 18-20 May 2004
- [14]Jyoti Dhiman, Shadab Ahmad, Kuldeep Gulia, "Comparision between adaptive filter algorithm (LMS,NLMS and RLS)". *International Journal of Science, Engineering and Technology Research (IJSETR) Volume 2, Issue 5, May 2013.*
- [15]Rashmi Panda, Umesh C. pati, "Removal of artifacts from electrocardiogram using digital filter", *Proceedings of IEEE Students' Conference on Electrical, Electronics and Computer Science*, pp. 1-4, Bhopal, March 2012
- [16]Gordan Cornelia, Reiz Romulus. "ECG SIGNALS PROCESSING USING WAVELETS". University of Oradea: Electronics Department, Oradea, Romania
- [17]Mahesh S Chavan, R A Agrawala, M.D. Uplane. " Design and implementation of Digital FIR Equiripple Notch Filter on ECG Signal for removal of Power line Interference" 4th Wseas International Conference on Electronics, Control & Signal Processing Miami Florida USA 17-19 Nov. 2005 (pp 58-63).
- [18]B.Pradeep Kumar,S. Balambigai." A Survey on ECG Denoising Techniques" .Bonfring International Journal of Advances in Image Processing,Vol. 2,Special Issue 1,Part 1, February 2012
- [19]Smita Kasar , Dr. Madhuri Joshi."ECG Signal Processing:A survey".
- [20]Girish Garg, Shorya Gupta ,Vijander Singh , J.R.P. Gupta and A.P.Mittal."Identification of Optimal Wavelet –Based Algorithm for Removal of Power Line Interferences in ECG Signals