

QR CODE WATERMARKING ALGORITHM BASED ON WAVELET TRANSFORM

P.Sunil Kumar¹, G.Reddi Basha², T.Lalith Kumar³

¹(PG Student, ECE, Sri Venkateswara Institute of Science and Technology. / JNTU A, India)

²(Assistant Professor, ECE, Sri Venkateswara Institute of Science and Technology. / JNTU A, India)

³(Associate Professor, ECE, Sri Venkateswara Institute of Science and Technology. / JNTU A, India)

Abstract: In the digital world copyright protection and authentication have become more significant; in order to achieve this digital different watermarking techniques are introduced for the security. We propose an algorithm in wavelet domain using wavelet transformation for a digital invisible watermarking is to embedded into a QR code image. In our method we embed a binary image logo considered as watermark embedded into one of selected wavelet sub band. The experimental results show that our method has more robustness to attacks in different considerations and it can achieve a viable copyright protection and authentication.

I.INTRODUCTION

Barcode becomes widely known because of their accuracy, and superior functionality characteristics. QR Code is a kind of 2D (two dimensional) Barcode symbol which is categorized in matrix code. It contains information in both the vertical and horizontal directions, whereas a 1D (one dimensional) Barcode symbol contains data in one direction only. QR Code holds a considerably greater volume of information than a 1D Barcode. QR Code developed by Denso Wave [1]. Bar codes are linear one-dimensional codes and can only hold up to 20 numerical digits, whereas QR codes are two-dimensional (2D) matrix barcodes that can hold 7,089 numeric characters and 4,296 alphanumeric characters, and 1,817 kanji characters of information [4].

In this paper, we describe a novel method to embed the QR code into still digital images. Most of the recent work in watermarking can be grouped into two categories: spatial domain methods, and frequency domain methods. Because frequency domain methods have better robustness than spatial domain, almost all techniques embed watermarks in the frequency domain, such as DCT and DWT [2],[3]. To

– (1) Finder Pattern: The three identical structures that are

increase robustness against JPEG degradation of the watermarked image, we embed the watermark in low frequency domains of DWT.

II.QR CODE

A.QR code[5]

QR (Quick Response) Codes are 2-dimensional bar codes that encode text strings and were introduced by the Japanese corporation Denso Wave Incorporated [6]. QR codes are considered as the evolution of the one dimensional barcodes. They are able to encode information in both vertical and horizontal direction, thus able to encode several times more information than the one dimensional barcodes. QR codes consist of black and white modules which represent the encoded data.

B.QR Code structure

Here we use as an example version 2, see Figure 1, which is the size that is most widely used, and based on [7], [8], [9], [10] analyze the structure of the QR Code.



Figure 1: Structure of QR Code Version 2 (from [11])

located in the upper corners and in the bottom left corner enable the decoder software to recognize the QR code and determine the correct orientation. These patterns also allow 360 degree (omni-directional) high-speed reading of the code. These structures consist of a 3 X 3 black square surrounded by white modules that are again surrounded by black modules.

- (2) Separators: The white separators that surround the Finder Patterns have width of one pixel and make it easier to distinguish the patterns.
- (3) Timing pattern: A sequence of black and white modules that help the decoder software to determine the width of a single module.
- (4) Alignment Pattern: This pattern allows the QR reader to correct for distortion when the code is bent or curved. The alignment pattern appears on version 2 and higher and the number of alignment patterns used depends on the version selected from the encoding.
- (5) Format Information: This section consists of 15 bits and contains the error correction rate and the selected mask pattern of the QR code. The error correction level can be identified from the first two modules of the timing pattern (see figure 2.2). The format information is read first when the QR code is decoded.
- (6) Data: After the data is converted into Reed-Solomon-encoded data bits, it is stored in 8 bit parts (code words) in the data section.
- (7) Error Correction: The data codewords are used in order to generate the error correction (EC) codewords, which are stored in the error correction section.
- (8) Remainder Bits: This section contains empty bits if the data or the error correction bits cannot be divided into 8 bit codewords without a remainder.

III. THE PROPOSED WATERMARKING PROCESS

In this paper we have chosen a watermark as binary image of Burapha University logo. In the frequency domain we perform the embedding process on QR code image using watermark. As shown in the figure we have to decompose the QR code image by two levels using two-dimensional wavelet transformation. To recover the embedded watermark we do not need the original QR code image subsequently

In our algorithm have two steps: watermark embedding and watermark extraction.

LL2	LH2	LH1
HL2	HH2	
HL1		HH1

Fig 2. 2-level 2-dimensional WT

A. Watermark Embedding

The following outlined procedure is for the embedding process (Fig.3)

Step of watermark image with secret key

- i. The watermark image was produced as a bit sequence of watermark **S**. The data and background values were set to 1 and -1, respectively.

$$S = \{s_i, 1 \leq i \leq N\}, s_i \in \{-1, 1\} \tag{1}$$

where *N* is the total number of pixels in the watermark image.

- ii. The pseudo-random sequence (**P**) whose each number can take a value either 1 or -1 was randomly generated with a secret key for embedding and extracting of the watermark.

$$P = \{p_i, 1 \leq i \leq M\}, p_i \in \{-1, 1\} \tag{2}$$

Step of QR code image

- III. The two-level DWT of *M* x *M* image (*t_i*) was computed for QR code image.
- IV. A watermark was then embedded in subband LH2 or HL2 or HH2. According to the rule:

$$t'_i = t_i + \alpha \cdot p_i \cdot s_i, i = 1, 2, \dots, N \tag{3}$$

where t_i is input image. t_i' is output image with watermark.
 a is a magnitude factor which is a constant determining the watermark strength.

- I. After that, the inverse DWT (IDWT) was then applied to obtain the watermarked image.
- II. Compute PSNR.

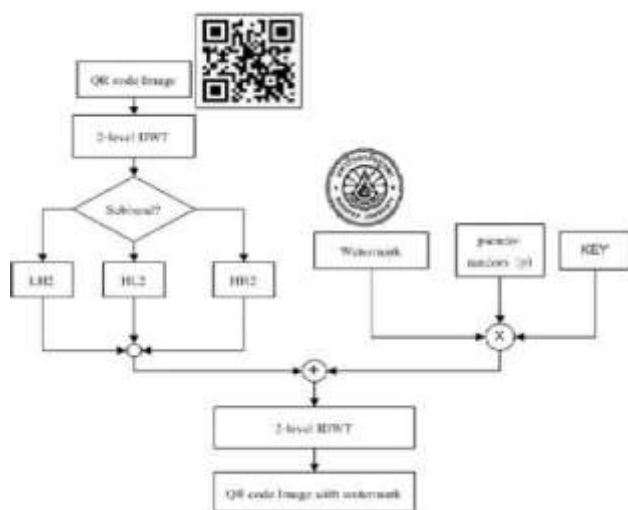


Fig. 3. Watermark Embedding Process

B. Watermark Extraction

The watermark extraction algorithm did not use the original QR code image. A prediction of the original value of the pixels is however needed.

Thus, a prediction of the original value of the pixels was performed using noise elimination technique. In this paper, we use an averaging 3×3 mask whose elements were fixed to $1/9$. The extraction processes are outlined as follows (Fig.4):

- I. The predicted image t_i^* could be obtained by smoothing the input image t_i with a spatial convolution mask. The prediction of the original value can be defined as:

$$\hat{t}_i = \frac{1}{c \times c} \sum_T t_i^*$$

where c is the size of the convolution mask. The watermarked image and the predicted image were DWT transformed independently.

- II. The estimate of the watermark S_1 is indicated by the difference between t_i and $*t_i$ as:

$$\hat{\delta} = t_i^* - \hat{t}_i = a \cdot p_i \cdot \hat{S}_i \quad (5)$$

- III. The sign of the difference between the predicted and the actual value is the value of the embedded bit:

$$sgn(\hat{\delta}_i) = p_i \cdot \hat{S}_i \quad (6)$$

- IV. Compute NC

The watermark was then estimated by multiplying pseudo- random number to the embedded bit. If an incorrect pseudo random sequence was to be used, the scheme would not work.

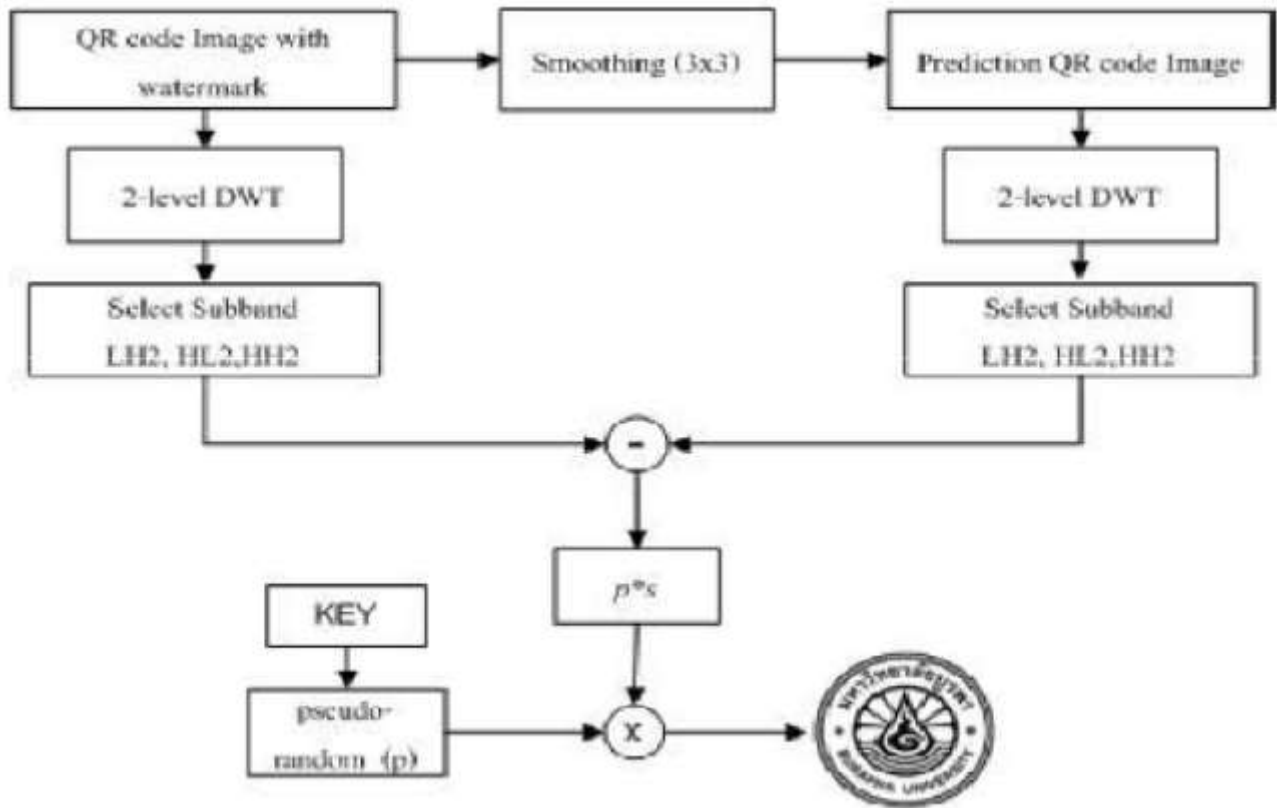


Fig 4. Watermark Extracting Process

IV.RESULTS

Sub band	PSNR	NC	Extracted Watermark
LH	43.061	0.9525	
HL	43.1514	0.961	
HH	44.265	0.9916	

Table iii

Attack Type	PSNR	NC	Decode QR code
Salt & Pepper Noise (0.02)	40.8837	0.9851	√
Salt & Pepper Noise (0.05)	38.4989	0.9687	√
Gaussian Noise (0.02)	37.2879	0.9945	√
Gaussian Noise (0.05)	37.1402	0.9943	√
JPEG (40)	39.3897	0.9942	√
JPEG (50)	39.3897	0.9942	√

Watermark Extraction

Alpha 5	Alpha 10	Alpha 15
Alpha 20	Alpha 25	Alpha 30
Alpha 35	Alpha 40	Alpha 45

Table I PSNR and NC of QR code Image

α	PSNR	NC	DECODE QR Code
5	47.1617	0.9826	✓
10	44.1514	0.9934	✓
15	42.3905	0.9961	✓
20	41.1411	0.9967	✓
25	40.1720	0.9975	✓
30	39.3802	0.9980	✓
35	38.7107	0.9986	✓
40	38.1308	0.9991	✓
45	37.6193	0.9995	✓

Attack Type	Attacked QR code image	Extracted Watermark
Salt & Pepper noise (0.02)		
Salt & Pepper noise (0.05)		
Gaussian noise (0.02)		
Gaussian noise (0.05)		
JPEG (40)		
JPEG (50)		

References

[1]“Denso wave incorporated,”
<http://www.densowave.com/qrcode/indexe.html>.

[2] Lumini A and Maio D (2000) A wavwlet-based image watermarking scheme In:Proc Int Conformation Technology. Coding and Computing pp.122-127.

[3] Alattar AM(2004) Reversible watermark using the difference expansion of a generalized integer transform.IEEE trans. Image process. 13:1147-1156.

[4] Jun-Chou Chang, Yu-Chen Hu & Hsien-Ju Ko. A Novel secret sharing Technique using QR code, International Journal of Image Processing (IJIP),volume (4): Issue(5), pp.468-475,2010.

[5]“QRCode,”http://en.wikipedia.org/wiki/QR_code.

[6] DENSO Wave Incorporated. What is a QR code?,2013. <http://www.qrcode.com/en/>. Accessed 10feb 2013.

[7]P. Kieseberg, M. Leithner, M. Mulazzani, L. Munroe, S. Schrittwieser, M. Sinha, E. Weipl. Qr code security. In Proceedings of the 8th International Conference on Advances in Mobile Computing and Multimedia, MoMM '10 (2010), pp. 430–435.

[8] Russ cox QArt codes,2012
<http://Research.switch.com/qart>. Accessed 05 Mar 2013.

[9] Thonky.com. QR code Tutorial,2012,
<http://www.thonky.com/qrcode-tutorial/>.

[10] Esponse.Innovative QR code campaingns (About QR codes),2013 [http:// www.esponse.com/about-qr-code](http://www.esponse.com/about-qr-code). Accessed 23 Mar 2013.



P.Sunil Kumar, received the B.Tech degree from the VITT, JNTU Anantapur,A.P, India in 2011. He is currently an M.Tech student in the Department of Electronics and Communication Engineering in the SVIST, Kadapa, JNTU Anantapur,A.P, India. His research interests to QR code watermarking Algorithm Based on wavelet Transform.



Sri.G.ReddiBasha Graduate in ECE from SVCET, Chithoor, affiliated to JNTU Hyderabad. Obtained M.Tech Degree in Digital Electronics and Communication Systems (DECS) from MITS, Madanapalli, affiliated to JNTU Anantapur. Working as Assistant Professor in SVIST, Kadapa, A.P.State, India.



Sri.T.LalithKumar received the B.Tech degree from the S.V.University of Tirupati, A.P, India in 1997, and the M.Tech degree from the Sathyabama University of Chennai, A.P, India in 2004.

He is a Associate Professor in the Department of Electronics and Communication Engineering and is having 18years of Teaching Experience and Paper Published IEEE explorer, National and international Conference, Journals, attended Workshops and short term courses in different areas. His working as Research scholar under the guidance of Dr.T.Kishore Kumar Associate Professor (NIT, Warangal) & Dr.K.Soundarya Rajan, Rector (Retired), JNTU Anantapur, A.P, India.