

A Location Privacy Using Monitoring System for Wireless Sensor Networks

D.Udhaya Kumara Pandian¹, P.Natarajan²

¹ Asst.Professor, ² P.G Scholar, Department of Computer Science & Engineering, Bharath University, Chennai.

Abstract— The advance in wireless sensor technologies has resulted in many new applications for military and/or civilian purposes. Many cases of these applications rely on the information of personal locations, for example, surveillance and location systems. These location-dependent systems are realized by using either identity sensors or counting sensors. For identity sensors, for example, bat and cricket, each individual has to carry a signal sender/ receiver unit with a globally unique identifier. With identity sensors, the system can pinpoint the exact location of each monitored person. On the other hand, counting sensors, for example, photoelectric sensors, and thermal sensors, are deployed to report the number of persons located in their sensing areas to a server.

Index Terms—Location privacy, wireless sensor networks, location monitoring system, aggregate query processing, spatial histogram

1 INTRODUCTION

The advance in wireless sensor technologies has resulted in many new applications for military and/or civilian purposes. Many cases of these applications rely on the information of personal locations, for example, surveillance and location systems. These location-dependent systems are realized by using either identity sensors or counting sensors. For identity sensors, for example, Bat [1] and Cricket [2], each individual has to carry a signal sender/receiver unit with a globally unique identifier. With identity sensors, the system can pinpoint the exact location of each monitored person. On the other hand, counting sensors, for example, photoelectric sensors [3], [4], and thermal sensors [5], are deployed to report the number of persons located in their sensing areas to a server.

Figure 1 gives an example of a privacy breach in a location monitoring system with counting sensors. There are 11 counting sensor nodes installed in nine rooms R_1 to R_9 , and two hallways C_1 and C_2 (Figure 1a). The non-zero number of persons detected by each sensor node is depicted as a number in parentheses. Figures 1b and 1c

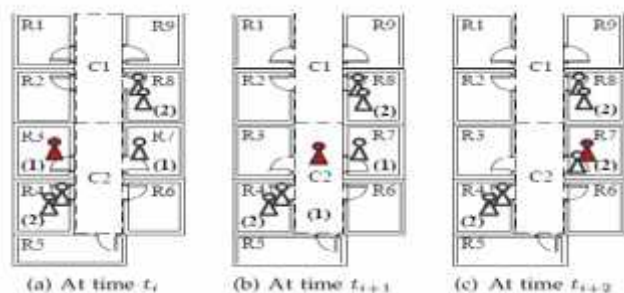


Fig. 1: A location monitoring system using counting sensors.

give the numbers reported by the same set of sensor nodes at two consecutive time instances t_{i+1} and t_{i+2} , respectively. If R_3 is Alice's office room, an adversary knows that Alice is in room R_3 at time t_i . Then the adversary knows that Alice left R_3 at time t_{i+1} and went to C_2 by knowing the number of persons detected by the sensor nodes in R_3 and C_2 . Likewise, the adversary can infer that Alice left C_2 at time t_{i+2} and went to R_7 . Such knowledge leakage may lead to several privacy threats. For example, knowing that a person has visited certain clinical rooms may lead to knowing her health records. Also, knowing that a person has visited a certain bar or restaurant in a mall building may reveal confidential personal information.

This paper proposes a privacy-preserving location monitoring system for wireless sensor networks to provide monitoring services. Our system relies on the well established k -anonymity privacy concept, which requires each person is indistinguishable among k persons. In our system, each sensor node blurs its sensing area into a *cloaked area*, in which at least k persons are residing. Each sensor node reports only aggregate location information, which is in a form of a cloaked area, A , along with the number of persons, N , located in A , where $N \geq k$, to the server. It is important to note that the value of k achieves a trade-off between the strictness of privacy protection and the quality of monitoring services. A smaller k indicates less privacy protection, because a smaller cloaked area will be reported from the sensor node; hence better monitoring services. However, a larger k results in a larger cloaked area, which will reduce the quality of monitoring services, but it provides better privacy protection. Our system can avoid the privacy leakage in the example given in Figure 1 by providing low quality location monitoring services for small areas that the adversary could use to track users, while providing high quality services for larger areas. The definition of a small area is relative to the required anonymity level, because our system provides better quality services for the same area if we relax the required

2 SYSTEM MODEL

anonymity level. Thus the adversary cannot infer the number of persons currently residing in a small area from our system output with any deity; therefore the adversary cannot know that Alice is in room R3. To preserve personal location privacy, we propose two in-network aggregate location anonymization algorithms, namely, *resource-* and *quality-aware* algorithms. Both algorithms require the sensor nodes to collaborate with each other to blur their sensing areas into cloaked areas, such that each cloaked area contains at least k persons to constitute a k-anonymous cloaked area. The resource-aware algorithm aims to minimize communication and computational cost, while the quality-aware algorithm aims to minimize the size of the cloaked areas, in order to maximize the accuracy of the aggregate locations reported to the server. In the resource-aware algorithm, each sensor node finds an adequate number of persons, and then it uses a greedy approach to cloaked area. On the other hand, the quality-aware algorithm starts from a cloaked area A, which is computed by the resource-aware algorithm. Then A will be iteratively refined based on extra communication among the sensor nodes until its area reaches the minimal possible size. For both algorithms, the sensor node reports its cloaked area with the number of monitored persons in the area as an aggregate location to the server.

Existing System:

Unfortunately, monitoring personal locations with a potentially un-trusted system poses privacy threats to the monitored individuals, because an adversary could abuse the location information gathered by the system to infer personal sensitive information. For the location monitoring system using identity sensors, the sensor nodes report the exact location information of the monitored persons to the server; thus using identity sensors immediately poses a major privacy breach. To tackle such a privacy breach, the concept of aggregate location information, that is, a collection of location data relating to a group or category of persons from which individual identities have been removed, has been suggested as an effective approach to preserve location privacy. Although the counting sensors by nature provide aggregate location information, they would also pose privacy breaches.

Proposed System :

A privacy-preserving location monitoring system for wireless sensor networks to provide monitoring services is proposed. This system relies on the well-established k-anonymity privacy concept, which requires each person is indistinguishable among k persons. In this system, each sensor node blurs its sensing area into a cloaked area, in which at least k persons are residing. Each sensor node reports only aggregate location information, which is in a form of a cloaked area A, along with the number of persons N, located in A, where $N \geq k$, to the server. It is important to note that the value of k achieves a trade-off between the strictness of privacy protection and the quality of monitoring services.

Figure 2 depicts the architecture of our system, where there are three major entities, *sensor nodes*, *server*, and *system users*. We will define the problem addressed by our system, and then describe the detail of each entity and the privacy model of our system.

Problem definition. Given a set of sensor nodes $s_1; s_2; \dots; s_n$ with sensing areas $a_1; a_2; \dots; a_n$, respectively, a set of moving objects $o_1; o_2; \dots; o_m$, and a required anonymity level k, (1) we find an aggregate location for each sensor node s_i in a form of $R_i = (Area_i; N_i)$, where $Area_i$ is a rectangular area containing the sensing area of a set of sensor nodes S_i and N_i is the number of objects residing in the sensing areas of the sensor nodes in S_i , such that $N_i \geq k, N_i = \sum_{s_j \in S_i} O_j \geq k, O_j = \sum_{o_l \in A_j} a_j$, $1 \leq i \leq n$, and $1 \leq l \leq m$; and (2) we build a spatial histogram to answer an aggregate query Q that asks about the number of objects in a certain area Q:Area based on the aggregate locations reported from the sensor nodes.

Sensor nodes. Each sensor node is responsible for determining the number of objects in its sensing area, blurring its sensing area into a cloaked area A, which includes at least k objects, and reporting A with the number of objects located in A as aggregate location information to the server. We do not have any assumption about the network topology, as our system only requires a communication path from each sensor node to the server through a distributed tree [10]. Each sensor node is also aware of its location and sensing area.

Server. The server is responsible for collecting the aggregate locations reported from the sensor nodes, using a spatial histogram to estimate the distribution of the monitored objects, and answering range queries based on the estimated object distribution. Furthermore, the administrator can change the anonymized level k of the system at anytime by disseminating a message with a new value of k to all the sensor nodes.

System users. Authenticated administrators and users can issue range queries to our system through either the server or the sensor nodes, as depicted in Figure 2. The server uses the spatial histogram to answer their queries.

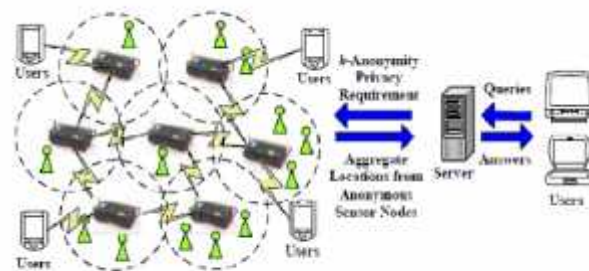


Fig. 2: System architecture.

Privacy model. In our system, the sensor nodes constitute a trusted zone, where they behave as defined in our algorithm and communicate with each other through a secure network channel to avoid internal network attacks, for example, eavesdropping, traffic analysis, and malicious nodes [6], [11]. Since establishing such a

secure network channel has been studied in the literature [6], [11], the discussion of how to get this network channel is beyond the scope of this paper. However, the solutions that have been used in previous works can be applied to our system. Our system also provides anonymous communication between the sensor nodes and the server by employing existing anonymous communication techniques [12], [13]. Thus given an aggregate location R , the server only knows that the sender of R is one of the sensor nodes within R . Furthermore, only authenticated administrators can change the k -anonymity level and the spatial histogram size. In emergency cases, the administrators can set the k -anonymity level to a small value to get more accurate aggregate locations from the sensor nodes, or even set it to zero to disable our algorithm to get the original readings from the sensor nodes, in order to get the best services from the system. Since the server and the system user are outside the trusted zone, they are untrusted.

We now discuss the privacy threat in existing location monitoring systems. In an identity-sensor location monitoring system, since each sensor node reports the exact location information of each monitored object to the server, the adversary can pinpoint each object's exact location. On the other hand, in a counting-sensor location monitoring system, each sensor node reports the number of objects in its sensing area to the server. The adversary can map the monitored areas of the sensor nodes to the system layout. If the object count of a monitored area is very small or equal to one, the adversary can infer the identity of the monitored objects based on the mapped monitored area, for example, Alice is in her office room at time instance t_j in Figure 1.

3 LOCATION ANONYMIZATION ALGORITHMS

In this section, we present our in-network resource- and quality-aware location anonymization algorithms that is periodically executed by the sensor nodes to report their k -anonymous aggregate locations to the server for every reporting period.

3.1 The Resource-Aware Algorithm

Algorithm 1 outlines the resource-aware location anonymization algorithm. Figure 3 gives an example to illustrate the resource-aware algorithm, where there are seven sensor nodes, A to G, and the required anonymity level is ve , $k = 5$. The dotted circles represent the sensing area of the sensor nodes, and a line between two sensor nodes indicates that these two sensor nodes can communicate directly with each other. In general, the algorithm has three steps.

Step 1: The broadcast step. The objective of this step is to guarantee that each sensor node knows an adequate number of objects to compute a cloaked area. To reduce communication cost, this step relies on a heuristic that a sensor node only forwards its received messages to its neighbors when some of them have not yet found an adequate number of objects. In this step, after each sensor node m initializes an empty list *PeerList* (Line 2 in Algorithm 1), m sends a message with its identity $m:ID$, sensing area $m:Area$, and the number of objects located in its sensing area $m:Count$, to its

neighbors (Line 3). When m receives a message from a peer p , i.e., $(p:ID; p:Area; p:Count)$, m stores the message in its *PeerList* (Line 5). Whenever m finds an adequate number of objects, m sends a *notification* message to its neighbors (Line 7). If m has not received the *notification* message from all its neighbors, some neighbor has not found an adequate number of objects; therefore m forwards the received message to its neighbors (Line 10).

Figures 3a and 3b illustrate the broadcast step. When a reporting period starts, each sensor node sends a message with its identity, sensing area, and the number of objects located in its sensing area to its neighbors. After the first broadcast, sensor nodes A to F have found an adequate number of objects (represented by black circles), as depicted in Figure 3a. Thus sensor nodes A to F send a *notification* message to their neighbors. Since sensor node F has not received a *notification* message from its neighbor G, F forwards its received messages, which include the information about sensor nodes D and E, to G (Figures 3b). Finally, sensor node G has found an adequate number of objects, so it sends a *notification* message to its neighbor, F. As all the sensor nodes have found an adequate number of objects, they proceed to the next step.

Algorithm 1 Resource-aware location anonymization

```

1: function RESOURCEAWARE (Integer k, Sensor m, List R)
2:   PeerList ← {}
   // Step 1: The broadcast step
3:   Send a message with m's identity m:ID, sensing area m:Area, and object count
   m:Count to m's neighbor peers
4:   if Receive a message from a peer p, i.e., (p:ID, p:Area, p:count) then
5:     Add the message to PeerList
6:     if m has found an adequate number of objects then
7:       Send a notification message to m's neighbors
8:     end if
9:     if Some m's neighbor has not found an adequate number of objects then
10:      Forward the message to m's neighbors
11:    end if
12:  end if
   // Step 2: The cloaked area step
13:  S ← {}
14:  S ← m
15:  Compute a score for each peer in PeerList
16:  Repeatedly select the peer with the highest score from PeerList to S until the total
   number of objects in S is at least k
17:  Area ← a minimum bounding rectangle of the sensor nodes in S
18:  N ← the total number of objects in S
   // Step 3: The validation step
19:  if No containment relationship with Area and R then
20:    Send (Area; N) to the peers within Area and the server
21:  else if m's sensing area is contained by some R then
22:    Randomly select a R such that R contains m's sensing area
23:    Send R to the peers within R and the server
24:  else
25:    Send Area with a cloaked N to the peers within Area and the server
26:  end if

```

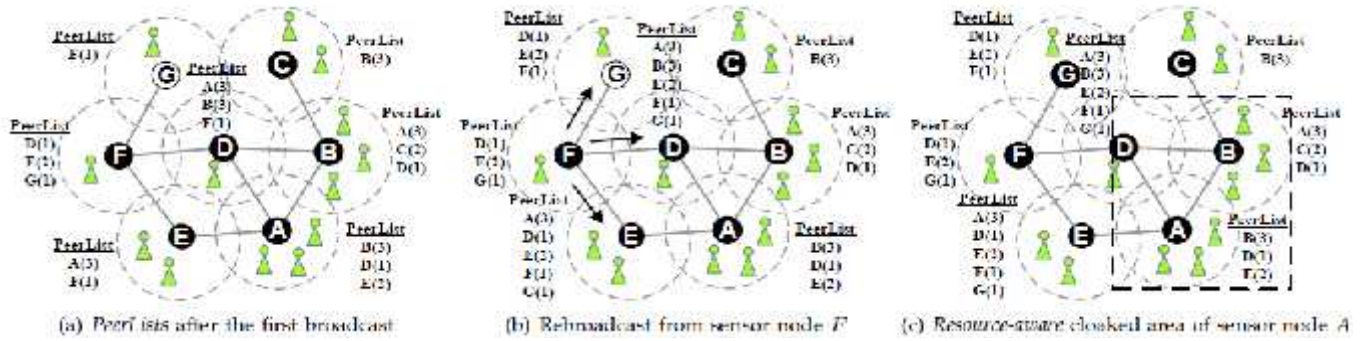


Fig. 3: The resource-aware location anonymization algorithm ($k = 5$).

approach to find a cloaked area based on the information stored in *PeerList*. For each sensor node m , m initializes a set $S = \{m\}$, and then determines a score for each peer in its *PeerList* (Lines 13 to 14 in Algorithm 1). The score is defined as a ratio of the object count of the peer to the Euclidean distance between the peer and m . The idea behind the score is to select a set of peers from *PeerList* to S to form a cloaked area that includes at least k objects and has an area as small as possible. Then we repeatedly select the peer with the highest score from the *PeerList* to S until S contains at least k objects (Line 15). Finally, m determines the cloaked area (Area) that is a *minimum bounding rectangle* (MBR) that covers the sensing area of the sensor nodes in S , and the total number of objects in S (N) (Lines 16 to 17).

Figure 3c illustrates the cloaked area step. The *PeerList* of sensor node A contains the information of three peers, B, D, and E. The object count of sensor nodes B, D, and E is 3, 1, and 2, respectively. We assume that the distance from sensor node A to sensor nodes B, D, and E is 17, 18, and 16, respectively. The score of B, D, and E is $3/17 = 0.18$, $1/18 = 0.06$, and $2/16 = 0.13$, respectively. Since B has the highest score, we select B. The sum of the object counts of A and B is six which is larger than the required anonymity level $k = 5$, so we return the MBR of the sensing area of the sensor nodes in S , i.e., A and B, as the resource-aware cloaked area of A, which is represented by a dotted rectangle.

Step 3: The validation step. The objective of this step is to avoid reporting aggregate locations with a containment relationship to the server. Let R_i and R_j be two aggregate locations reported from sensor nodes i and j , respectively. If R_i 's monitored area is included in R_j 's monitored area, $R_i : Area \subseteq R_j : Area$ or $R_j : Area \subseteq R_i : Area$, they have a containment relationship. We do not allow the sensor nodes to report their aggregate locations with the containment relationship to the server, because combining these aggregate locations may pose privacy leakage. For example, if $R_i : Area \subseteq R_j : Area$. In case that $R_j : N \setminus R_i : N < k$, the adversary knows that the number of objects in the non-overlapping is less than k , which violates the k -anonymity privacy requirement. As this step ensures that no aggregate location with the containment relationship is reported to the server, the adversary cannot obtain any deterministic information from the aggregate locations.

In this step, each sensor node m maintains a list R to store the aggregate locations sent by other peers. When a reporting period

starts, m nullifies R . After m finds its aggregate location R_m , m checks the containment relationship between R_m and the aggregate locations stored in R . If there is no containment relationship between R_m and the aggregate locations in R , m sends R_m to the peers within $R_m : Area$ and the server (Line 19 in Algorithm 1). Otherwise, m randomly selects an aggregate location R_p from the set of aggregate locations in R that contain m 's sensing area, and m sends R_p to the peers within $R_p : Area$ and the server (Lines 21 to 22). In case that no aggregate location in R contains m 's sensing area, m finds a set of aggregate locations in R that are contained by R_m , R^0 , and N^0 is the number of monitored persons in R_m that is not covered by any aggregate location in R^0 . If $N^0 < k$, the containment relationship does not violate the k -anonymity privacy requirement;

Algorithm 2 Quality-aware location anonymization

```

1: function QUALITY_AWARE (Integer  $k$ , Sensor  $m$ , Set  $init\_solution$ , List  $R$ )
2:    $current\_min\_cloaked\_area \leftarrow init\_solution$ 
   // Step 1: The search space step
3:   Determine a search space  $S$  based on  $init\_solution$ 
4:   Collect the information of the peers located in  $S$ 
   // Step 2: The minimal cloaked area step
5:   Add each peer located in  $S$  to  $C[1]$  as an item
6:   Add  $m$  to each itemset in  $C[1]$  as the first item
7:   for  $i = 1; i \leq 4; i++$  do
8:     for each itemset  $X = \{a_1, \dots, a_{i+1}\}$  in  $C[i]$  do
9:       if  $Area(MBR(X)) < Area(current\_min\_cloaked\_area)$  then
10:        if  $N(MBR(X)) \geq k$  then
11:           $current\_min\_cloaked\_area \leftarrow X$ 
12:          Remove  $X$  from  $C[i]$ 
13:        end if
14:      else
15:        Remove  $X$  from  $C[i]$ 
16:      end if
17:    end for
18:  if  $i < 4$  then
19:    for each itemset pair  $X = \{x_1, \dots, x_{i+1}\}$ ,  $Y = \{y_1, \dots, y_{i+1}\}$  in  $C[i]$  do
20:      if  $x_1 = y_1, \dots, x_i = y_i$  and  $x_{i+1} \neq y_{i+1}$  then
21:        Add an itemset  $\{x_1, \dots, x_{i+1}, y_{i+1}\}$  to  $C[i+1]$ 
22:      end if
23:    end for
24:  end if
25: end for
26: Area a minimum bounding rectangle of  $current\_min\_cloaked\_area$ 
27:  $N$  the total number of objects in  $current\_min\_cloaked\_area$ 
   // Step 3: The validation step
28: Lines 18 to 25 in Algorithm 1

```


therefore m sends R_m to the peers within R_m :Area and the server. However, if $N^0 < k$, m cloaks the number of monitored persons of R_m , $R_m:N$, by increasing it by an integer uniformly selected between k and $2k$, and sends R_m to the peers within R_m :Area and the server (Line 24). Since the server receives an aggregate location from each sensor node for every reporting period, it cannot tell whether any containment relationship takes place among the actual aggregate locations of the sensor nodes.

3.2 The Quality-Aware Algorithm

Algorithm 2 outlines the quality-aware algorithm that takes the cloaked area computed by the resource-aware algorithm as an initial solution, and then refines it until the cloaked area reaches the minimal possible area, which still satisfies the k -anonymity privacy requirement, based on extra communication between other peers. The quality-aware algorithm initializes a variable current minimal cloaked area by the input initial solution (Line 2 in Algorithm 2). When the algorithm terminates, the current minimal cloaked area contains the set of sensor nodes that constitutes the minimal cloaked area. In general, the algorithm has three steps.

Step 1: The search space step. Since a typical sensor network has a large number of sensor nodes, it is too costly for a sensor node m to gather the information of all the sensor nodes to compute its minimal cloaked area. To reduce communication and computational cost, m determines a search space, S , based on the input initial solution, which is the cloaked area computed by the resource-aware algorithm, such that the sensor nodes outside S cannot be part of the minimal cloaked area (Line 3 in Algorithm 2). We will describe how to determine S based on the example given in Figure 4. Thus gathering the information of the peers residing in S is enough for m to compute the minimal cloaked area for m (Line 4).

Figure 4 illustrates the search space step, in which we compute S for sensor node A . Let $Area$ be the area of the input initial solution. We assume that $Area = 1000$. We determine S for A by two steps. (1) We find the minimum bounding rectangle (MBR) of the sensing area of A . It is important to note that the sensing area can be in any polygon or irregular shape. In Figure 4a, the MBR of the sensing area of A is represented by a dotted rectangle, where the edges of the MBR are labeled by e_1 to e_4 . (2) For each edge e_i of the MBR, we compute an MBR_i by extending the opposite edge such that the area of the extended MBR_i is equal to $Area$. S is the MBR of the four extended MBR_i . Figure 4b depicts the extended MBR_1 of the edge e_1 by extending the opposite edge e_3 , where $MBR_1:x$ is the length of MBR_1 , $MBR_1:y = Area = MBR_1:x$ and $Area = 1000$. Figure 4c shows the four extended MBRs, MBR_1 to MBR_4 , which are represented by dotted rectangles. The MBR of the four extended MBRs constitutes S , which is represented by a rectangle (Figure 4d). Finally, the sensor node only needs the information of the peers within S .

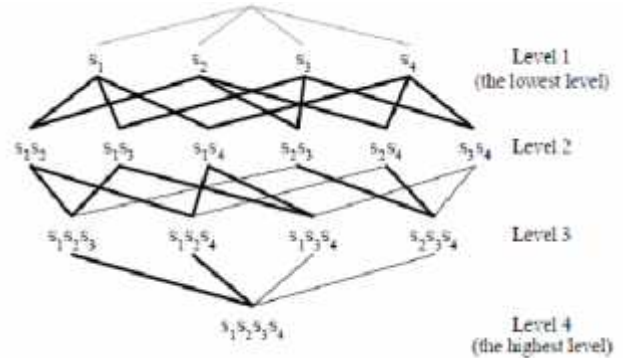


Fig. 5: The lattice structure of a set of four items.

Step 2: The minimal cloaked area step. This step takes a set of peers residing in the search space, S , as an input and computes the minimal cloaked area for the sensor node m . Although the search space step already prunes the entire system space into S , exhaustively searching the minimal cloaked area among the peers residing in S , which needs to search all the possible combinations of these peers, could still be costly. Thus we propose two optimization techniques to reduce computational cost.

The basic idea of the *rst* optimization technique is that we do not need to examine all the combinations of the peers in S ; instead, we only need to consider the combinations of at most four peers. The rationale behind this optimization is that an MBR is defined by at most four sensor nodes because at most two sensor nodes define the width of the MBR (parallel to the x -axis) while at most two other sensor nodes define the height of the MBR (parallel to the y -axis). Thus this optimization mainly reduces computational cost by reducing the number of MBR computations among the peers in S . The correctness of this optimization technique will be discussed in Section 3.2.2.

The second optimization technique has two properties, *lattice structure* and *monotonicity property*. We first describe these two properties, and then present a *progressive refinement* approach for finding a minimal cloaked area.

A. Lattice structure. In a lattice structure, a data set that contains n items can generate $2^n - 1$ itemsets excluding a *null* set. In the sequel, since the *null* set is meaningless to our problem, it will be neglected. Figure 5 shows the lattice structure of a set of four items $S = \{s_1; s_2; s_3; s_4\}$, where each black line between two itemsets indicates that an itemset at a lower level is a subset of an itemset at a higher level. For our problem, given a set of sensor nodes $S = \{s_1; s_2; \dots; s_n\}$, all the possible combinations of these sensor nodes are the non-empty subsets of S ; thus we can use a lattice structure to generate the combinations of the sensor nodes in S . In the lattice structure, since each itemset at level i has i items in S , each combination at the lowest level, level 1, contains a distinct item in S ; therefore there are n itemsets at the lowest level. We generate the lattice structure from the same, $x_1 = y_1$, $x_2 = y_2, \dots, x_{i-1} = y_{i-1}$, and $x_i \neq y_i$, we generate a new itemset with $i + 1$ items, $\{x_1; \dots; x_i; y_i\}$.

In the example, we use bold lines to illustrate the construction of the lattice structure based on the generation rule. For example, the itemset $\{s_1; s_2; s_3; s_4\}$ at level 4 is combined by the itemsets $\{s_1; s_2; s_3\}$ and $\{s_1; s_2; s_4\}$ at

level 3, so there is a bold line from $fs_1; s_2; s_3; s_4g$ to $fs_1; s_2; s_3g$ and another one to $fs_1; s_2; s_4g$.

B. Monotonicity property. Let S be a set of items, and P be the power set of S , 2^S . The monotonicity property of a function f indicates that if X is a subset of Y , then $f(X)$ must not exceed $f(Y)$, i.e., $X \subseteq Y \Rightarrow f(X) \leq f(Y)$. For our problem, the MBR of a set of sensor nodes S has the monotonicity property, because adding sensor nodes to S must not decrease the area of the MBR of S or the number of objects within the MBR of S . Let $Area(MBR(X))$ and $N(MBR(X))$ be two functions that return the area of the MBR of an itemset X and the number of monitored objects located in the MBR, respectively. Thus, given two item sets X and Y , if $X \subseteq Y$, then $Area(MBR(X)) \leq Area(MBR(Y))$ and $N(MBR(X)) \leq N(MBR(Y))$. By this property, we propose two pruning conditions in the lattice structure.

C. Progressive re nement. Since the monotonicity prop-erty shows that we would not need to generate a com-plete lattice structure to compute a minimal cloaked area, we generate the lattice structure of the peers in the search space, S , progressively from the lowest level of the lattice structure to its higher levels, in order to minimize the computational and storage overhead. To compute the minimal cloaked area for the sensor node m , we rst generate an itemset for each peer in S at the lowest level of the lattice structure, $C[1]$ (Line 5 in Algorithm 2). To accommodate with our problem, we add m to each item-set in $C[1]$ as the rst item (Line 6). Such accommodation does not affect the generation of the lattice structure, but each itemset has an extra item, m . For each itemset X in $C[1]$, we determine the MBR of X , $MBR(X)$. If the area of $MBR(X)$ is less than the *current minimal cloaked area* and the total number of objects in $MBR(X)$ is at least k , we set X to the *current minimal cloaked area*, and remove X from $C[1]$ based on the rst pruning condition of the monotonicity property (Lines 11 to 12). However, if the area of $MBR(X)$ is equal to or larger than the area of the *current minimal cloaked area*, we also remove X from $C[1]$ based on the second pruning condition of the monotonicity property (Line 15). Then we generate the itemsets, where each itemset contains two items, at the second lowest level of the lattice structure, $C[2]$, based on the remaining itemsets in $C[1]$ based on the generation rule of the lattice structure. We repeat this procedure until we produce the itemsets at the highest level of the lattice structure, $C[4]$, or all the itemsets at the current level are pruned (Lines 19 to 23). After we examine all non-pruned itemsets in the lattice structure, the *current minimal cloaked area* stores the combination giving the minimal cloaked area (Lines 26 to 27).

Figure 6 illustrates the minimal cloaked area step that computes the minimal cloaked area for sensor node A . The set of peers residing in the search space is $S = \{B; D; E\}$. We assume that the area of the MBR of $\{A; B\}$, $\{A; D\}$, and $\{A; E\}$ is 1000, 1200, and 900, respectively. The number of objects residing in the MBR of $\{A; B\}$, $\{A; D\}$, and $\{A; E\}$ is six, four, and ve, respectively, as depicted in

Figure 3. Figure 6a depicts the full lattice structure of S where A is

added to each itemset as the rst item. Initially, the *current minimal cloaked area* is set to the initial solution, which is the MBR of $\{A; B\}$ computed by the resource-aware algorithm. The area of the MBR of $\{A; B\}$, $Area(MBR(\{A; B\}))$, is 1000 and the total number of monitored objects in $MBR(\{A; B\})$, $N(MBR(\{A; B\}))$, is six. It is important to note that the progressive re nement approach may not require our algorithm to compute the full lattice structure. As depicted in Figure 6b, we construct the lowest level of the lattice structure, where each itemset contains a peer in S . Since the area of $MBR(\{A; B\})$ is the *current minimal cloaked area*, we remove $\{A; B\}$ from the lattice structure; hence the itemsets at the higher levels that contain $\{A; B\}$, $\{A; B; D\}$, $\{A; B; E\}$, and $\{A; B; D; E\}$ (enclosed by a dotted oval), will not be considered by the algorithm. Then, we consider the next itemset $\{A; D\}$. Since the area of $MBR(\{A; D\})$ is larger than the *current minimal cloaked area*, this itemset is removed from the lattice structure. After pruning $\{A; D\}$, the itemsets at the higher levels that contain $\{A; D\}$, $\{A; D; E\}$ (enclosed by a dotted oval), will not be considered (Figure 6c). We can see that all itemsets beyond the lowest level of the lattice structure will not be considered by the algo-rithm. Finally, we consider the last itemset $\{A; E\}$. Since the area of $MBR(\{A; E\})$ is less than *current minimal cloaked area* and the total number of monitored objects in $MBR(\{A; E\})$ is $k = 5$, we set $\{A; E\}$ to the *current minimal cloaked area* (Figure 6d). As the algorithm cannot generate any itemsets at the higher level of the lattice structure, it terminates. Thus the minimal cloaked area is the MBR of sensor nodes A and E , and the number of monitored objects in this area is ve.

3.2.1 Analysis

A *brute-force* approach of nding the minimal cloaked area of a sensor node has to examine all the combinations of its peers. Let N be the number of sensor nodes in the system. Since each sensor node has $N - 1$ peers,

$$\text{we have to consider } \sum_{i=1}^{N-1} C^{N-1}_i = 2^{N-1} - 1 \text{ MBRs}$$

to nd the minimal cloaked area. In our algorithm, the search space step determines a search space, S , and prunes the peers outside S . Let M be the number of peers in S , where $M \leq N - 1$. Thus the computational

$$\text{cost is reduced to } \sum_{i=1}^M C^M_i = 2^M - 1. \text{ In the minimal}$$

cloaked area step, the rst optimization technique in-dicates that an MBR can be de ned by at most four peers. As we need to consider the combinations of at most four peers, the computational cost is reduced to

$$\sum_{i=1}^4 C^M_i = (M^4 - 2M^3 + 11M^2 + 14M) = 24 = O(M^4).$$

Furthermore, the second optimization technique uses the monotonicity property to prune the combinations, which cannot give the minimal cloaked area. In our example, the brute-force approach considers all the combinations of six peers; hence this approach computes $2^6 - 1 = 63$ MBRs to nd the minimal cloaked area of sensor node A . In our algorithm, the search space step reduces the entire space into S , which contains only three peers; hence this step needs to compute $2^3 - 1 = 7$ MBRs. After examining the

three itemsets at the lowest level of the lattice structure, all other itemsets at the higher levels are pruned. Thus the progressive re nement ap-proach considers only three combinations.

Therefore our algorithm reduces over 95% computational cost of the brute-force approach, as it reduces the number of MBR computations from 63 to 3.

3.2.2 Proof of Correctness

In this section, we show the correctness of the quality-aware location anonymization algorithm.

Theorem 1: Given a resource-aware cloaked area of size Area of a sensor node s, a search space, S, computed by the quality-aware algorithm contains the minimal cloaked area.

Proof: Let X be the minimal cloaked area of size equal to or less than Area. We know that X must totally cover the sensing area of s. Suppose X is not totally covered by S, X must contain at least one extended MBR, MBR_i , where $1 \leq i \leq 4$ (Figure 4c). This means that the area of X is larger than the area of an extended MBR, Area. This contradicts to the assumption that X is the minimal cloaked area; thus X is included in S. \square

Theorem 2: A minimum bounding rectangle (MBR) can be defined by at most four sensor nodes.

Proof: By definition, given an MBR, each edge of the MBR touches the sensing area of some sensor node. In an extreme case, there is a distinct sensor node touching each edge of the MBR but not other edges. The MBR is defined by four sensor nodes, which touch different edges of the MBR. For any edge e of the MBR, if multiple sensor nodes touch e but not other edges, we can simply pick one of these sensor nodes, because any one of these sensor nodes gives the same e. Thus an MBR is defined by at most four sensor nodes. \square

4 SPATIAL HISTOGRAM

In this section, we present a spatial histogram that is embedded inside the server to estimate the distribution of the monitored objects based on the aggregate locations reported from the sensor nodes. Our spatial histogram is represented by a two-dimensional array that models a grid structure G of N_R rows and N_C columns; hence, the system space is divided into $N_R \times N_C$ disjoint equal-sized grid cells. In each grid cell $G(i; j)$, we maintain a float value that acts as an estimator $H[i; j]$ ($1 \leq i \leq N_C, 1 \leq j \leq N_R$) of the number of objects within its area. We assume that the system has the ability to know the total number of moving objects M in the system. The value of M will be used to initialize the spatial histogram. In practice, M can be computed online for both indoor and outdoor dynamic environments. For the indoor environment, the sensor nodes can be deployed at each entrance and exit to count the number of users entering or leaving the system [4], [5]. For the outdoor environment, the sensor nodes have been already used to count the number of people in a predefined area [3]. We use the spatial histogram to provide approximate location monitoring services. The accuracy of the spatial histogram that indicates the utility of our privacy-preserving location monitoring system will be evaluated in Section 6.

Algorithm 3 Spatial histogram maintenance

```

1: function HISTOGRAMMAINTENANCE (AggregateLocationSet R)
2: for each aggregate location R ∈ R do
3:   if there is an existing partition P = {R1; ...; Rj} such that
     R:Area ⊆ P then
4:     Add R to P
5:   else
6:     Create a new partition for R
7:   end if
8: end for
9: for each partition P do
10:  for each aggregate location Rk ∈ P do
11:    Rk:N = H[i; j]
12:    For every cell G(i; j) ∈ Rk:Area, H[i; j]
13:  end for
14:  P:Area = R1:Area ∪ ... ∪ Rj:Area
15:  For every cell G(i; j) ∈ P:Area,
     H[i; j] = H[i; j] + Rk:N
16: end for

```

Algorithm 3 outlines our spatial histogram approach.

Initially, we assume that the objects are evenly distributed in the system, so the estimated number of objects within each grid cell is $H[i; j] = M / (N_R \times N_C)$. The input of the histogram is a set of aggregate locations R reported from the sensor nodes. Each aggregate location R in R contains a cloaked area, R:Area, and the number of monitored objects within R:Area, R:N. First, the aggregate locations in R are grouped into the same partition P = {R₁; R₂; ...; R_j} if their cloaked areas are not overlapping with each other, which means that for every pair of aggregate locations R_i and R_j in P, $R_i:Area \cap R_j:Area = \emptyset$ (Lines 2 to 8). Then, for each partition P,

locations to the spatial histogram at the same time. For each aggregate location R in P , we record the estimation error, which is the difference between the sum of the estimators within $R.Area$, $R.\hat{N}$, and $R.N$, and then $R.N$ is uniformly distributed among the estimators within $R.Area$; hence, each estimator within $R.Area$ is set to $R.N$ divided by the total number of grid cells within $R.Area$ (Lines 10 to 13). After processing all the aggregate locations in P , we sum up the estimation error of each aggregate location in P , $\sum_{k=1}^{|P|} R_k.\hat{N} - R_k.N$, that is uniformly distributed among the estimators outside $P.Area$, where $P.Area$ is the area covered by some aggregate location in P , $P.Area = \cup_{R_k \in P} R_k.Area$ (Line 15). Formally, for each partition P that contains $|P|$ aggregate locations R_k ($1 \leq k \leq |P|$), every estimator in the histogram is updated as follows:

$$\mathcal{H}[i, j] = \begin{cases} \frac{R_k.N}{\text{No. of cells within } R_k.Area} & \text{for } \mathcal{G}(i, j) \in R_k.Area \\ \mathcal{H}[i, j] + \frac{\sum_{k=1}^{|P|} R_k.\hat{N} - R_k.N}{\text{No. of cells outside } P.Area} & \text{for } \mathcal{G}(i, j) \notin P.Area \end{cases}$$

5 SYSTEM EVALUATION

In this section, we discuss an attacker model, the experiment setting of our privacy-preserving location monitoring system in a wireless sensor network, and the performance metrics.

5.1 Attacker Model

To evaluate the privacy protection of our system, we simulate an attacker attempting to infer the number of objects residing in a sensor node's sensing area. We will analyze the evaluation result in Section 6.1. The key idea of the attacker model is that if the attacker cannot infer the exact object count of the sensor node from our system output, the attacker cannot infer the location information corresponding to an individual object. We consider the worst-case scenario where the attacker has the background knowledge about the system, i.e., the map layout of the system, the location of each sensor node, the sensing area of each sensor node, the total number of objects currently residing in the system, and the aggregate locations reported from the sensor nodes. In general, the attacker model is defined as: *Given an area*

A (that corresponds to the monitored area of a sensor node)

and a set of aggregate locations $R = \{R_1; R_2; \dots; R_j; R_j\}$ overlapping with A , the attacker estimates the number of

The probability of n distinct objects in a region S of size s is: $P(N(S) = n) = \frac{e^{-\lambda s} (\lambda s)^n}{n!}$, where λ is computed as the number of objects in the system divided by the area of the system.

Suppose that the object count of each aggregate location R_i is n_i , where $1 \leq i \leq |\mathcal{R}|$, and the aggregate locations in \mathcal{R} and A constitute m non-overlapping subregions S_j , where $1 \leq j \leq m$; hence, $N(R_i) = \sum_{S_j \in R_i} N(S_j) = n_i$. Each subregion must either intersect or not intersect A , and it intersects one or more aggregate locations. If a subregion S_k intersects A , but none of the aggregate locations in \mathcal{R} , then $N(S_k) = 0$. The probability mass function of the number of distinct objects in A being equal to n_a , $\mathcal{N} = n_a$, given the aggregate locations in \mathcal{R} can be expressed as follows:

$$\begin{aligned} & P(\mathcal{N} = n_a | N(R_1) = n_1, \dots, N(R_{|\mathcal{R}|}) = n_{|\mathcal{R}|}) \\ &= \frac{P(\mathcal{N} = n_a, N(R_1) = n_1, \dots, N(R_{|\mathcal{R}|}) = n_{|\mathcal{R}|})}{P(N(R_1) = n_1, \dots, N(R_{|\mathcal{R}|}) = n_{|\mathcal{R}|})} \\ &= \frac{\sum_{V_i \in (V_S \cap V_A) < v_1^i, v_2^i, \dots, v_m^i >}{\sum_{V_j \in V_S} < v_1^j, v_2^j, \dots, v_m^j >}, \end{aligned} \tag{1}$$

where the notation $V = \langle v_1, v_2, \dots, v_m \rangle$ represents the joint probability that there are v_i objects in a subregion S_i ($1 \leq i \leq m$); the joint probability is computed as $\prod_{1 \leq i \leq m} P(N(S_i) = v_i)$. The lower and upper bounds of v_i (denoted as $LB(v_i)$ and $UB(v_i)$, respectively) are zero and the minimum n_j of the aggregate locations inter-

6 EXPERIMENTAL RESULTS AND ANALYSIS

In this section, we show and analyze the experimental results with respect to the privacy protection and the quality of location monitoring services of our system.

6.1 Anonymization Strength

Figure 7 depicts the resilience of our system to the attacker model with respect to the anonymity level and the number of objects. In the figure, the performance of the resource- and quality-aware algorithms is represented by black and gray bars, respectively. Figure 7a depicts that the stricter the anonymity level, the larger the attacker model error will be encountered by an adversary. When

the anonymity level gets stricter, our algorithms generate larger cloaked areas, which reduce the accuracy of the aggregate locations reported to the server. Figure 7b number shows that of objects the attacker gets larger model error, this error is reduced because as when the

there are more objects, our algorithms generate smaller cloaked areas, which increase the accuracy of the aggregate locations reported to the server. It is difficult to set a hard quantitative threshold for the attacker model error. However, it is evident that the adversary cannot infer the number of objects in the sensor node's sensing area with any delity.

6.2 Effect of Query Region Size

Figure 8 depicts the privacy protection and the quality of our location monitoring system with respect to in-creasing the query region size ratio from 0.001 to 0.256, where the query region size ratio is the ratio of the query region area to the system area and the query region size ratio 0.001 corresponds to the size of a sensor node's

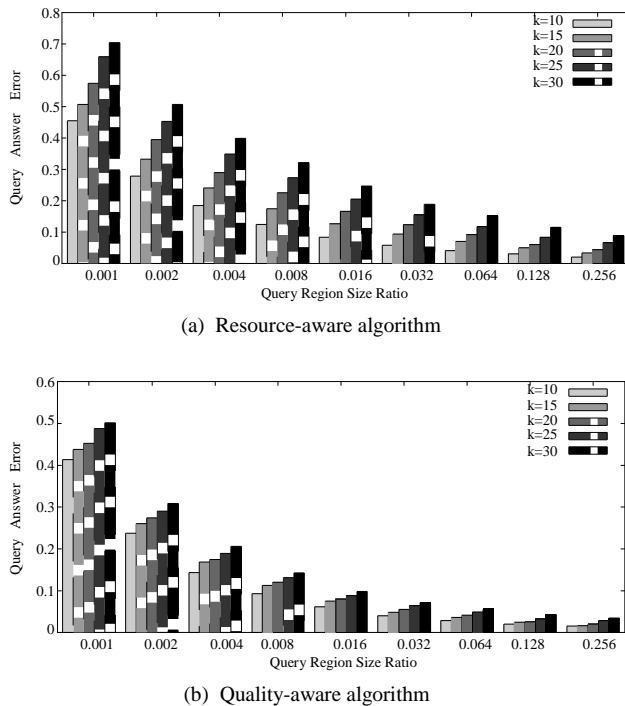


Fig. 8: Query region size.

sensing area. The results give evidence that our system provides low quality location monitoring services for the range query with a small query region, and better quality services for larger query regions. This is an important feature to protect personal location privacy, because providing the accurate number of objects in a small area could reveal individual location information; therefore an adversary cannot use our system output to track the monitored objects with any delity. The definition of a small query region is relative to the required anonymity level k . For example, we want to provide low quality services, such that the query error is at least 0.2, for small query regions. For the resource-aware algorithm, Figure 8a shows that when $k = 10$, a query region is said to be small if its query region size is not larger than 0.002 (it is about two sensor nodes' sensing area). However, when $k = 30$, a query region is only considered as small if its query region size is not larger than 0.016 (it is about 16 sensor nodes' sensing area). For the quality-aware algorithm, Figure 8b shows that when $k = 10$, a query region is said to be small if its query region size is not larger than 0.002, while when $k = 30$, a query region is only considered as small if its query region size is not larger than 0.004. The results also show that the quality-

aware algorithm always performs better than the resource-aware algorithm.

6.3 Effect of the Number of Objects

Figure 9 depicts the performance of our system with respect to increasing the number of objects from 2,000 to 10,000. Figure 9a shows that when the number of objects increases, the communication cost of the resource-aware algorithm is only slightly affected, but the quality-aware algorithm significantly reduces the communication cost. The broadcast step of the resource-aware algorithm effectively allows each sensor node to find an adequate number of objects to blur its sensing area. When there are more objects, the sensor nodes smaller cloaked areas that satisfy the k -anonymity privacy requirement, as given in Figure 9b. r; hence the communication cost of gathering the information of the peers in such a smaller required search space reduces. Likewise, since there are less peers in the smaller required search space as the number of objects increases, finding the minimal cloaked area incurs less minimum bounding rectangle (MBR) computation (Figure 9c). Since our algorithms generate smaller cloaked areas when there are more users, the spatial histogram can gather more accurate aggregate locations to estimate the object distribution; therefore the query answer error reduces (Figure 9d). The result also shows that the quality-aware algorithm always provides better quality services than the resource-aware algorithm.

6.4 Effect of Mobility Speeds

Figure 11 gives the performance of our system with respect to increasing the maximum object mobility speed from $[0; 5]$ and $[0; 30]$. The results show that increasing the object mobility speed only slightly affects the communication cost and the cloaked area size of our algorithms, as depicted in Figures 11a and 11b, respectively. Since the resource-aware cloaked areas are slightly affected by the mobility speed, the object mobility speed has a very small effect on the required search space computed by the quality-aware algorithm. Thus the computational cost of the quality-aware algorithm is also only slightly affected by the object mobility speed (Figure 11c). Although Figure 11d shows that query answer error gets worse when the objects are moving faster, the query accuracy of the quality-aware algorithm is consistently better than the resource-aware algorithm.

7 RELATED WORK

Straightforward approaches for preserving users' location privacy include enforcing privacy policies to restrict the use of collected location information [15], [16] and anonymizing the stored data before any disclosure [17]. However, these approaches fail to prevent internal data thefts or inadvertent disclosure. Recently, location anonymization techniques have been widely used to anonymize personal location information before any server gathers the location information, in order to preserve personal location privacy in location-based services. These techniques are based on one of the three concepts. (1) *False locations*. Instead of reporting the monitored object's exact location, the object reports n different locations, where only one of them is the object's actual location while the rest are false locations [18].


(2) *Spatial cloaking*. The spatial cloaking technique blurs a user's

location into a cloaked spatial area that satisfy the user's species privacy requirements (3) *Space transformation*. This technique transforms the location information of queries and data into another space, where the spatial relationship among the query and data are encoded [29].

Among these three privacy concepts, only the spatial cloaking technique can be applied to our problem. The main reasons for this are that (a) the false location techniques cannot provide high quality monitoring services due to a large amount of false location information;

(b) the space transformation techniques cannot provide privacy-preserving monitoring services as it reveals the monitored object's exact location information to the query issuer; and (c) the spatial cloaking techniques can provide aggregate location information to the server and balance a trade-off between privacy protection and the quality of services by tuning the specified privacy requirements, for example, k-anonymity and minimum area privacy requirements [17], [27]. Thus we adopt the spatial cloaking technique to preserve the monitored object's location privacy in our location monitoring system.

Architecture diagram :

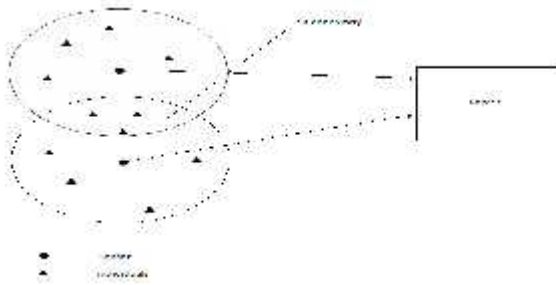

8 CONCLUSION

In this paper, we propose a privacy-preserving location monitoring system for wireless sensor networks. preserves personal location privacy that enabling the system to provide location monitoring services. Both algorithms rely on the well-established k-anonymity privacy concept that requires a person is indistinguishable among k persons. Sensor nodes execute our location anonymization algorithms to provide k-anonymous aggregate locations, in which each aggregate location is a cloaked area A with the number of monitored objects, N, located in A, where $N \geq k$, for the system.

Reference :

- [1] A. Harter, A. Hopper, P. Steggle, A. Ward, and P. Webster, "The Anatomy of a Context-Aware Application," *Proc. ACM MobiCom*, 1999.
- [2] N.B. Priyantha, A. Chakraborty, and H. Balakrishnan, "The Cricket Location-Support System," *Proc. ACM MobiCom*, 2000.
- [3] B. Son, S. Shin, J. Kim, and Y. Her, "Implementation of the Real-Time People Counting System Using Wireless Sensor Networks," *Int'l J. Multimedia and Ubiquitous Eng.*, vol. 2, no. 2, pp. 63-80, 2007.
- [4] Onesystems Technologies, "Counting People in Buildings," http://www.onesystemstech.com.sg/index.php?option=com_content&task=view&id=10, 2009.
- [5] Traf-Sys Inc., "People Counting Systems," <http://www.trafsys.com/products/people-counters-thermal-sensor.aspx>, 2009.

- [6] M. Gruteser, G. Schelle, A. Jain, R. Han, and D. Grunwald, "Privacy-Aware Location Sensor Networks," *Proc. Ninth Conf. Hot Topics in Operating Systems (HotOS)*, 2003.
- [7] G. Kaupins and R. Minch, "Legal and Ethical Implications of Employee Location Monitoring," *Proc. 38th Ann. Hawaii Int'l Conf. System Sciences (HICSS)*, 2005.
- [8] Location Privacy Protection Act of 2001, <http://www.techlawjournal.com/cong107/privacy/locations1164is.asp>, 2010.
- [9] Title 47 United States Code Section 222 (h) (2), http://frwebgate.access.gpo.gov/cgi-bin/getdoc.cgi?dbname=browse_usc&docid=Cite:+47USC222, 2009.
- [10] D. Culler and M.S. Deborah Estrin, "Overview of Sensor Networks," *Computer*, vol. 37, no. 8, pp. 41-49, Aug. 2004.
- [11] A. Perrig, R. Szewczyk, V. Wen, D.E. Culler, and J.D. Tygar, "SPINS: Security Protocols for Sensor Networks," *Proc. ACM MobiCom*, 2001.
- [12] J. Kong and X. Hong, "ANODR: Anonymous on Demand Routing with Untraceable Routes for Mobile Ad-Hoc Networks," *Proc. ACM MobiHoc*, 2003.

- [13] P. Kamat, Y. Zhang, W. Trappe, and C. Ozturk, "Enhancing Source-Location Privacy in Sensor Network Routing," *Proc. 25th IEEE Int'l Conf. Distributed Computing Systems (ICDCS)*, 2005.
- [14] S. Guo, T. He, M.F. Mokbel, J.A. Stankovic, and T.F. Abdelzaher, "On Accurate and Efficient Statistical Counting in Sensor-Based Surveillance Systems," *Proc. Fifth IEEE Int'l Conf. Mobile Ad Hoc and Sensor Systems (MASS)*, 2008.
- [15] K. Bohrer, S. Levy, X. Liu, and E. Schonberg, "Individualized Privacy Policy Based Access Control," *Proc. Sixth Int'l Conf. Electronic Commerce Research (ICECR)*, 2003.
- [16] E. Sneekenes, "Concepts for Personal Location Privacy Policies," *Proc. Third ACM Conf. Electronic Commerce (EC)*, 2001.
- [17] L. Sweeney, "Achieving k-Anonymity Privacy Protection Using Generalization and Suppression," *Int'l J. Uncertainty, Fuzziness and Knowledge-Based Systems*, vol. 10, no. 5, pp. 571-588, 2002.
- [18] H. Kido, Y. Yanagisawa, and T. Satoh, "An Anonymous Communication Technique Using Dummies for Location-Based Services," *Proc. Int'l Conf. Pervasive Services (ICPS)*, 2005.